





产品特性

- 支持Intel LGA1700 封装第12&13代 i9/i7/i5/i3/G系列CPU
- 2*DDR5-SODIMM插槽，最大支持64GB
- DP+ HDMI 双显示接口
- 4*USB3.0, 2*USB2.0
- 2*RS485/232
- 4*Intel千兆网口, 1*CAN总线
- 24V DC IN

接口布局

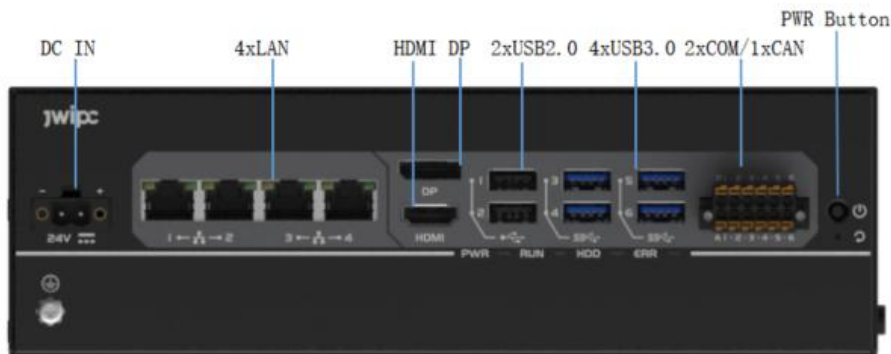

产品尺寸

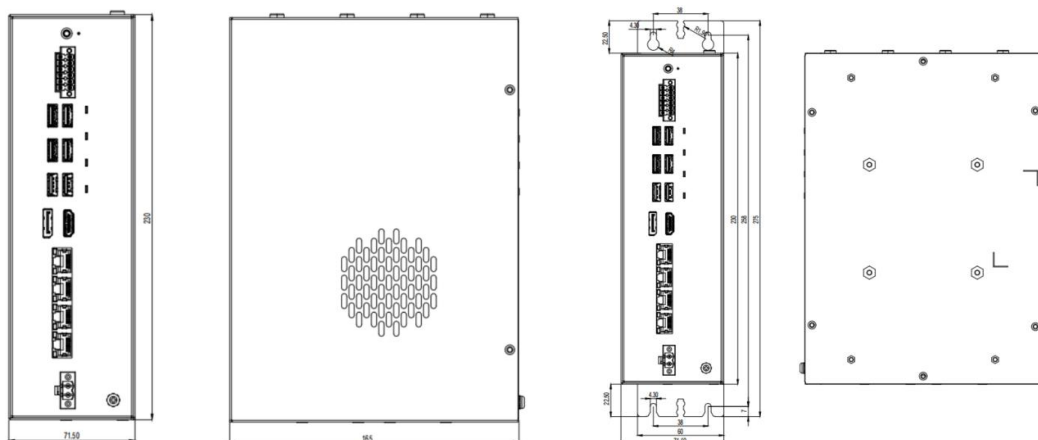

系统	处理器	Intel LGA1700 封装第12&13代i9/i7/i5/i3/G全系CPU,TDP 65W
	芯片组	H610
	BIOS	AMI UEFI BIOS
	显卡	Intel CPU integrated Gen.12 Graphics Engines
	内存	2xDDR5 4800MHz SO-DIMM, up to 64GB
	操作系统	Windows10, Windows11,Linux, Ubuntu 21.04及以上
I/O 接口	USB	4xUSB 3.0, 2xUSB 2.0
	COM	2xRS485/232 (与CAN一起, 集成在12Pin凤凰端子上)
	CAN总线	1xCAN总线 (与COM一起, 集成在12Pin凤凰端子上)
	LED	1xPWR,1xRUN,1xHDD,1xERR
扩展	M.2	1xM.2 Key B Socket (3042/3052) support 4G/5G
显示	Graphics Processor	Intel®UHD Graphics 730-770
	Interface	1xDP, Up to 3840 x 2160 @60Hz 1xHDMI, Up to 4096 x2160 @60Hz
存储	Storage Device	1xM.2 Key M Socket (2242/2280,NVME)
以太网	LAN	4x Intel GbE LAN (1xi219V, 2xi226V, 1xi210AT)
	Interface	4xRJ45
电源	Power Input	24V, DC-in
	Power Interface	2Pin凤凰端子
其它	Watchdog Timer	255级可编程秒/分, 支持超时中断或系统复位
	TPM	支持TPM2.0, 板载加密芯片SLB9670
物理参数	Dimensions	230mm(L)×165mm(W)×71.5mm(H)
	Weight	1.4 KG
	Mounting	Desk/Wall-mounting, Din rail mounting
工作环境	Operating Temp.	-40℃~55℃
	Storage Temp.	-40℃~85℃
	Humidity	0~90% Humidity, non-condensing
	Shock	使用SSD: 15G, IEC 60068-2-27, half sine, 11ms duration
	Vibration	使用SSD: 2Grms, IEC 60068-2-64, random, 5~500Hz, 1 hr/axis

型号	处理器	显示	DIMM	LAN	USB3.0	USB2.0	COM	M.2
PAS-7510F	H610	2	2	4	4	2	2	1

■ 装箱清单

配件编号	描述	数量
PAS-7510F	PAS-7510F准系统	1
300600013312	电源适配器,DA-180C24-AAAE,180W,AC100~240V,24V,7.5A,凤凰端子	1
301800000601	Flat Cable,Power,外部电源线-AC-1.83m-黑色,3C-250V/10A,国标三插XBH-G32-3X0.75mm2-品字尾	1
302300018249	PAS-7000 侧壁挂条	1
302300018251	PAS-7000 底部挂耳	2
302300000937	DIN卡扣	1
301700006521	凤凰端子,2x6Pin	1
NA	螺丝包	1